



# RACHET SPACERS INSTRUCTIONS

## SPECIFIC INSTRUCTIONS

### KIT CONTENT

4x screws - 2x Male spacers - 2x Female spacers

### COMPATIBILITY

Spacers can be installed on all standard tie down ratchet for 50 mm wide webbing, and works with slackline longline from 22 up to 26 mm width.

### CHECKS

Before every usage check: the spacer and screw firmness; that there are no signs of wear, cracking, corrosion or deformation. Warning! Sharp edges could damage the slackline. In case of doubt, return the product to manufacturer for inspection.

### WARNINGS

The device has been designed to be used in weather conditions that can normally be withstood by humans (temperature of use within -20°C and +40°C). All the materials and treatments are hypoallergenic and do not cause skin irritation or sensitivity.



## GENERAL INSTRUCTIONS FOR USE

### WARNINGS BEFORE USE

Read carefully the instructions and ensure that you fully understand them; ensure that all equipment is in perfect operating conditions and that all the elements and components are compatible with each other and comply with the rules, regulations and directives currently in place; check that the system is assembled correctly and that the various components work without interfering with one another. Warning! Always check that any webbing used are compatible with the system: i.e webbing narrower than 22 mm are not compatible. Each individual is responsible for his/her own choices and actions: anyone who is not capable of assuming this responsibility must not use these devices under any circumstances. The responsibility of the manufacturer is limited defectiveness related to manufacturing and the materials used.

### LIFE SPAN

The actual device life span cannot be predicted precisely, as it is influenced by many factors (environment of use, weather factors, storage conditions, frequency and intensity of use, etc.) but it is possible to estimate its maximum life span, which is constituted by an initial period of optimum storage and by a period of operational life. It is advisable to replace them after 10 years of use. Warning! In case of doubts on the functioning and good conservation state of a device, do not use it and contact immediately your reference person of safety matters or the manufacturer.

### TAMPERING AND REPAIRS

Any alteration or tampering immediately voids the guarantee, and is forbidden as it can compromise the safety of the device itself.

### GUARANTEE


The guarantee is valid for 3 years as from the purchase date and covers for any manufacturing defect or defect in the materials used. The following are excluded from the guarantee: normal wear, inadequate maintenance and storage, incorrect or improper usage, unauthorized tampering or repairs, lack of observance of the instructions for use. The manufacturer declines all liabilities concerning the direct, indirect or accidental consequences, including any consequence that derives from the incorrect use of the devices.

## USE INSTRUCTIONS


**01.** Use a screwdriver to connect male with female spacers.



**02. WARNING:** The spacer' side step must face to the ratchet side.

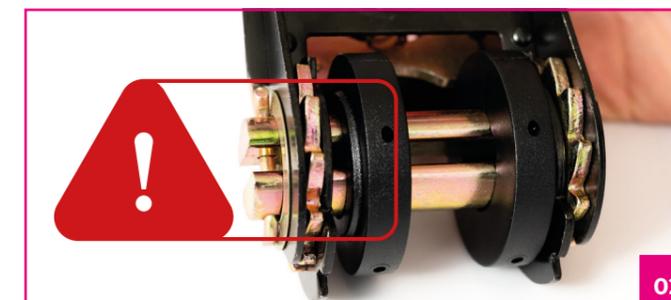

**03.** The inner space between spacers must be smooth for the slackline.

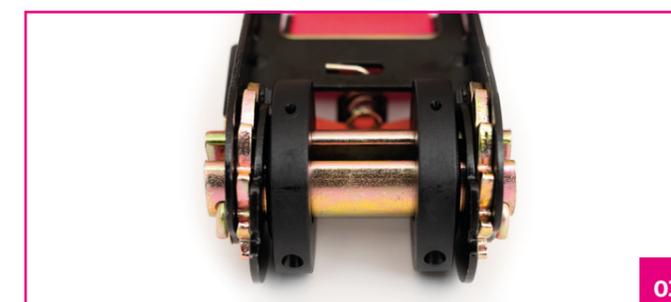

Additional information and the updated versions of the instructions at [www.SPIDER-SLACKLINES.com](http://www.SPIDER-SLACKLINES.com)